

# SPW Wall Pack

Luminaires: Wall Pack Lights

**SPW-1:** 8 1/2" (L) x 9" (H) x 6 1/2" (D)  
**SPW-2:** 14 1/2" (L) x 9 1/4" (H) x 7 1/4" (D)  
**SPW-3:** 17" (L) x 9 1/4" (H) x 9 3/4" (D)  
**SPW-4:** 17" (L) x 9 1/4" (H) x 12 3/4" (D)

*For Ordering Information see reverse.*

Perimeter, accent and security lighting are fortes of these top-of-the line wall pack luminaires. Used extensively outdoors and indoors in parking garages, tunnels, overpasses, walkways, recreational areas, loading docks and waterfronts, among other sites.

Available in High-Pressure Sodium, Metal Halide, or, Incandescent lamp sources.

SPW Wall Packs align with all standard recessed outlet boxes. Die-cast aluminum housing finished in powder coated architectural bronze. Borosilicate glass or molded polycarbonate prismatic lens. Weather-tight seal between housing and lens frame.



*SPW-2 Wall Pack*



*SPW-1 Small Wall Pack*

**Sentry**  
ELECTRIC

## SPW Wall Pack

**Sentry Electric LLC**

185 Buffalo Avenue, Freeport, New York, 11520

Telephone: 516.379.4660 Fax: 516.378.0624

[www.sentrylighting.com](http://www.sentrylighting.com)

[info@sentrylighting.com](mailto:info@sentrylighting.com)

# SPW Wall Pack

Luminaires: Wall Pack Lights

## Product Features

### Construction

Aluminum die cast construction. Polycarbonate (SPW1) or borosilicate glass lens (SPW2, SPW3, and SPW4). Optional polycarbonate protective shield and/or stainless wire guard (SPW2, SPW3, and SPW4 only). Also, available with optional Dark Sky Shield (SPW2, SPW3, and SPW4 only). Lens (SPW1) or enclosure door (SPW2, SPW3, and SPW4) hinged to allow maintenance. Weather-tight seal between housing and lens.

### Optical

Available in a wide range of lamp choices and wattage ratings, including High Intensity Discharge (HID) and Incandescent.

Specular internal reflector and prismatic lens radiate output light in a highly efficient "down-out" distribution.

### Electrical

Meets UL 1598 for Safety. Luminaire shall have porcelain socket rated for 600V with 4kV pulse and uses a nickel-plated screw shell with spring-loaded center contact and lamp grips. Luminaires shall be prewired and factory tested. The ballast shall be a high power factor, constant wattage autotransformer type. The power factor shall be at least 90%.

### Finish

To insure product durability, all exposed metallic surfaces shall be finished with a high performance powder coat paint to be applied utilizing a multistage process to insure resistance to weathering, corrosion, abrasion, and UV. Color to be Architectural Bronze.

### Mounting


#### SPW1

Four tapped holes and enclosure plugs for conduit, or, photocontrol (1/2" NPS). Mounting may also be accomplished using lag bolts through backside of wallpak (lag bolts not included).

#### SPW2, SPW3, and SPW4

Precision die cast aluminum plate with knockouts for all recessed outlet boxes allows retrofitting over existing boxes. Two tapped holes and enclosure plugs for conduit or photocontrol (1/2" NPS).

## Model

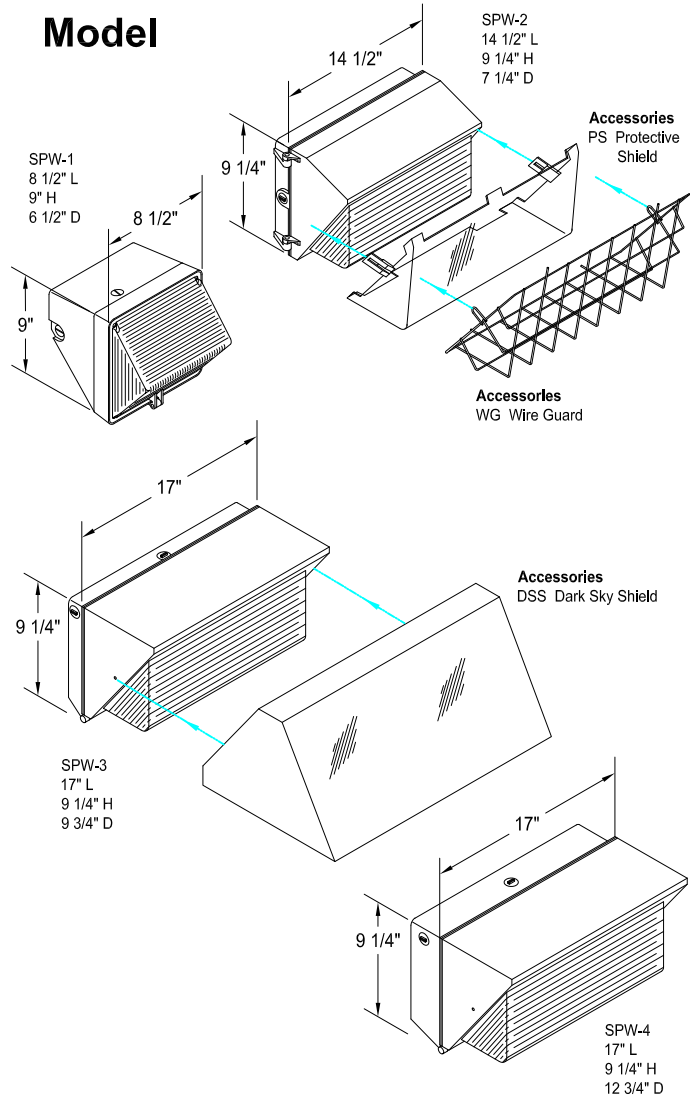

## Ordering Information

Choose the **boldface** catalog references that best suit your needs.

Example: **SPW-2 - 100MHPS - 120V - BPC - PS - WG**

Model	Wattage/ Lamp	Voltage	Options	Accessories
SPW-1	<b>INC</b> 50HPS 70HPS 100HPS Incandescent 50 watt, 70 watt, 100 watt High Pressure Sodium Only available in Medium socket.	Single Line <b>120V</b>		<b>PS</b> Protective Shield (SPW-2, SPW-3, and SPW-4 only)
SPW-2	<b>INC</b> 100MHPS 150MHPS 100 watt, 150 watt Pulse Start Metal Halide <b>70HPS 100HPS 150HPS</b> 70 watt, 100 watt, 150 watt High Pressure Sodium	Multi-Tap <b>120V-MT</b> <b>208V-MT</b> <b>240V-MT</b> <b>277V-MT</b>		<b>WG</b> Wire Guard (SPW-2, SPW-3, and SPW-4 only) <b>DSS</b> Dark Sky Shield (SPW-2, SPW-3, and SPW-4 only)
SPW-3	<b>250HPS</b> 250 watt High Pressure Sodium Only available in Mogul socket.			
SPW-4	<b>400MHPS</b> 250HPS 400HPS 400 watt Pulse Start Metal Halide 250 watt, 400 watt High Pressure Sodium Only available in Mogul socket.			
Consult factory for other lamping options.				